

03-13-00

A

Patent
101-881Assistant Commissioner of Patents
Box Patent Application
Washington, DC 20231Transmitted herewith is the U.S. Patent Application of
Inventor: Thomas W. Stephens, et al
For: Load Cell Apparatus and Method

The following checked items are enclosed:

☒ Stamped, Self Addressed Postcard to be Returned
☒ Check for \$385.00 (\$345.00 filing fee & \$40.00 recordation fee)
☒ Declaration and Power of Attorney
18 Pages of Specification Including Abstract
20 Total Number of Claims
2 Independent Claims
8 Sheets of Drawings
☒ Verified Statement Claiming Small Entity Status
☒ Information Disclosure Statement Under 37 C.F.R. §1.97
☒ Assignment with Recordation Form Cover Sheet

JC564 U.S. PTO
09/523385
03/10/00

If there is any additional fee due, please charge such additional fee to Deposit Account No. 19-1453 (Our File No. 101-881).

The filing fee was calculated as follows:

Basic Fee -----	\$345.00
Assignment -----	\$ 40.00

Total Fee ----- \$385.00

Respectfully submitted,

SHAFFER & CULBERTSON, L.L.P.

Dated: 10 MAR 00By: J. Nevin Shaffer

J. Nevin Shaffer, Jr., Reg. No. 29,858
 Russell D. Culbertson, Reg. No. 32,124
 Attorneys for Applicant
 Building One, Suite 360
 1250 Capital of Texas Hwy. S.
 Austin, TX 78746
 (512) 327-8932

pc: Mr. Steve Cochran

"Express Mail" Mailing label number EL533563728US

Date of Deposit: March 10, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Services "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Applications, Washington, DC 20231

Reg. No. 29,858, J. Nevin Shaffer, Jr.

\\C:\db\A-D\Amtext\101\APPLICAT.LTR.wpd

Applicant or Patentee: Thomas W. Stephens, et al
Serial or Patent No.: unknown
Filed or Issued: Herewith
For: LOAD CELL APPARATUS AND METHOD

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
37 C.F.R. §1.9(f) and §1.27(c) - SMALL BUSINESS CONCERN

I hereby declare that I am

☐ the owner of the small business concern identified below:
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN Cranium Corporation
ADDRESS OF CONCERN 1505 Cliffside Drive
 Austin, TX 78704

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 C.F.R. §21.3-18, and reproduced in 37 C.F.R. §1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled LOAD CELL APPARATUS AND METHOD by inventors Thomas W. Stephens and Donald R. Zudsky, described in

☒ the specification filed herewith
☐ application serial no. _____, filed _____
☐ patent no. _____ issued _____

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 C.F.R. §1.9(d) or by any concern which would not qualify as a small business concern under 37 C.F.R. §1.9(d) or a nonprofit organization under 37 C.F.R. §1.9(e). *NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 C.F.R. §1.27)

NAME _____
ADDRESS _____
☐ INDIVIDUAL ☒ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

NAME _____
ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

SIGNATURE SC DATE 3-10-08

[illegible]

C:\db\A-D\Amtex\101\SMALL.BUS.wpd

LOAD CELL APPARATUS AND METHOD

INVENTORS:

THOMAS W. STEPHENS AND DONALD R. ZRUDSKY

"Express Mail" Mailing label number EL533563728US

Date of Deposit: March 10, 2000

I hereby certify that this paper or fee is being deposited with the United States Postal Services "Express Mail Post Office to Addressee" service under 37 C.F.R. §1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Reg. No. 29,858, J. Nevin Shaffer, Jr.

J. Van Allen

LOAD CELL APPARATUS AND METHOD

BACKGROUND OF THE INVENTION

This invention relates to an improved load cell apparatus and method. In particular, this invention relates to a load cell apparatus and method for use in harsh industrial environments.

The art of load cells is well developed. The use of load cells to assist in determining the weight of objects placed upon or supported by load cells greatly assists users in the weighing process. A difficulty arises when load cells are used in harsh industrial environments where the sensitive load cells of the prior art are overwhelmed. For example, to date, the use of load cells in the scrap metal industry is essentially non-existent. The reason for this is that both the machines used in the environment, i.e. grappling crane or a magnetic lift, and the materials being lifted i.e. huge pieces of scrap metal, place extraordinary strain on the delicate load cell mechanism.

A drawback to the load cell systems known in the art is that they are not sufficiently robust to be used in extreme environments. Thus, there is a need in the art for providing a load cell apparatus and method which is capable of use in the harshest environment. It, therefore, is an object of this invention to provide an improved load cell apparatus and method capable of withstanding extreme forces of impact and lift and still provide accurate load measurements.

SHORT STATEMENT OF THE INVENTION

Accordingly, the load cell system of the present invention includes a frame to which an upper compliance assembly is connected. A load cell is connected to the upper compliance assembly and a lower compliance assembly is connected to the load cell. In a preferred

embodiment, the upper and lower compliance assemblies include a first base, a compression pad, a rebound pad, a load plate located between the rebound and the compression pad, and a second base connected to the rebound pad or the compression pad. In a further embodiment, the load cell includes a load cell yoke connected to the upper assembly and an upper and lower loading saddle connected to the load cell. In a further embodiment, an overload limit is provided. In a preferred embodiment, the overload limit includes a fixed overload limit and a moving overload limit. In a further embodiment, a rotation preventor is provided and in a still further embodiment a data transfer device is provided for providing data to the load cell and for receiving data from the load cell.

A corresponding load cell method for use in a weighing system is set forth hereafter and claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and advantages of the present invention will become more fully apparent from the following detailed description of the preferred embodiment, the appended claims, and the accompanying drawings in which:

FIGURE 1 is a partial section view of the load cell apparatus of the present invention;

FIGURE 2 is a partial section view of the upper detail of the present invention above the rod end link;

FIGURE 3 is a partial section view of the lower detail of the present invention below the rod end link;

FIGURE 4 is an isometric view of the major components of the present invention;

FIGURE 5 is a front view of FIGURE 4 including a two-axis tilt compensating support assembly and a load shackle.

FIGURE 6 is a back view of FIGURE 5;

FIGURE 7 is a front view of FIGURE 5 with cover plate in place; and

FIGURE 8 is a back view of FIGURE 5 with cover plate in place.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiment of the present invention is illustrated by way of example in FIGURES 1 - 8. With specific reference to FIGURE 1, a load cell system 10 includes a frame 12, an upper compliance assembly 14, a load cell 16, and a lower compliance assembly 18.

FIGURE 1 also illustrates upper hanger stud 20 connected to upper compliance assembly 14. Also shown is rod end link 22 connected to load cell 16 and to lower compliance assembly 18. Also illustrated are anti-rotation device 24, fixed overload limit 26, and moving overload limit 28.

FIGURE 1 also illustrates drawbar 30 and drawbar bearing 32. Finally, cross pin bearing 34 is illustrated which provides two-axis tilt compensating support assembly as more fully described hereafter.

Referring now to FIGURE 2, the upper detail of load cell system 10 is illustrated. As can clearly be seen, upper hanger stud 20 is connected to upper compliance assembly 14. Upper compliance assembly 14 includes first base 36, rebound pad 38, load plate 40, a pair of side plates 42 (one side plate 42 has been omitted for clarity), compression pad 44, and second base 46. Upper compliance assembly 14 provides an enclosed assembly, therefore, by the combination of

1 first base 36, side plates 42 and second base 46. All of the elements of upper compliance
2 assembly 14 are held together by means of a pair of load plate locating pins 48 and a pair of base
3 locating pins 50. Only one of the pair of base locating pins 50 is shown by way of the partial
4 section view in FIGURE 2. Location of load plate 40 with relation to base 36 is by means of four
5 locating pins tightly fitting through the compliant pad material. One pair of pins 48 are press fitted
6 in the load plate 40 and pads 38 and 44 and pass freely without contact through first base 36 and
7 second base 46. A second pair of pins 50 are press fitted in first base 36 and pads 38 and 44 and
8 pass freely without contact through load plate 40.

9 Partial section view of FIGURE 2 also shows load cell 16 and its various accompanying
10 components. In a preferred embodiment, load cell 16 further includes load cell mounting yokes
11 52. Load cell loading saddle 54 is connected to load cell 16 and to rod end link 22. Load cell
12 loading saddle 54 in a preferred embodiment includes upper load cell loading saddle 56 and lower
13 load cell loading saddle 58.

14 FIGURE 2 also illustrates a pair of load cell mount pins 60, one of four load cell cushion
15 "O" rings 62 and load cell output 64. Load cell output 64 may be of any type now known or
16 hereafter developed. In a preferred embodiment, a hard wire electrical output cord is connected
17 to load cell output 64 and run internally through frame 12 until it can safely exit frame 12 in a
18 manner to avoid harm during activation and use of load cell system 10. Otherwise, load cell
19 output 64, in a preferred embodiment, includes an electronic transmission device whereby the
20 output of load cell 16 is electronically transmitted to a remote receiver thereby eliminating the
21 possibility of breaking the load cell output 64 connection through use of load cell system 10 in a
22 harsh environment.

FIGURE 2 also illustrates cross pin bearing 34. Cross pin bearing 34 in a preferred embodiment includes cross pin bearing seal 66 and cross pin bearing seal housing 68. These housings also function as locating faces to a two-axis tilt compensating support assembly 88, discussed more fully hereafter. Load cell 16 may be connected to upper compliance assembly 14 by any means now known or hereafter developed. In a preferred embodiment, upper hanger stud 20 connects upper compliance assembly 14 to frame 12. A pair of load cell mounting yokes 52 connect load cell 16 to upper compliance assembly 14 by a pair of load cell mount pins 60 as illustrated. Load cell 16 is centered within load cell mounting yokes 52 by means of cushion "O" rings 62. Weighing forces are applied to load cell 16 by load cell loading saddle 54 which is connected to the middle of load cell 16.

FIGURE 3 illustrates the lower detail of load cell system 10 of the present invention. Beginning at rod end link 22, lower compliance assembly 18 is illustrated. As with upper compliance assembly 14, lower compliance assembly 18 includes in reverse order, the same elements. That is, from top to bottom, lower compliance assembly 18 includes first base 36, rebound pad 38, load plate 40, compression pad 44, and second base 46. Lower compliance assembly also includes side plates 42. As with the upper compliance assembly 14, the internal components of the lower compliance assembly 18 are located by a pair of load plate loading pins 48 and a pair of base locating pins 50.

Referring to FIGURES 2 and 3, rod end link 22 is shown to be comprised of a female portion 70 connected to the load cell loading saddle 54 and a male portion 72 connected to lower compliance assembly 18. Further, drawbar 30 is shown in detail including lower seal housing 74,

1 drawbar bearing lower seal 76, drawbar bearing 78, drawbar bearing spacer 80 and drawbar
2 bearing upper seal 82.

3 FIGURE 3 also illustrates fixed overload limit 26 and moving overload limit 28 and anti-
4 rotation device 24. In a preferred embodiment, anti-rotation device 24 includes anti-rotation guide
5 84 and anti-rotation guide bearing 86. Anti-rotation guide 84 in a preferred embodiment is
6 connected, as illustrated, to frame 12 and anti-rotation guide bearing 86 is connected to moving
7 overload limit 28.

8 Referring now to FIGURE 4, a plan view of the major components of load cell system 10
9 of the present invention is illustrated. Again, these major elements include frame 12, upper
10 compliance assembly 14, load cell 16, and lower compliance assembly 18. Further, rod end link
11 22, cross pin bearing 34 and drawbar 30 are illustrated. Likewise, fixed overload limit 26,
12 moving overload limit 28 and anti-rotation guide 84 are shown.

13 Referring now to FIGURES 5 and 6, FIGURE 5 shows a front view and FIGURE 6 is a
14 back view of the major components of load cell system 10 further including two axis tilt
15 compensating support assembly 88 connected to frame 12 by two axis support cross pin 90
16 through cross pin bearing 34 in frame 12. As is known in the art, stick pin 92 is utilized to
17 connect two axis tilt compensating support assembly 88 to cranes (not shown).

18 FIGURES 5 and 6 also illustrate shackle 94 connected to drawbar 30 by bolt 96. Again,
19 FIGURE 5 is the front view and FIGURE 6 is the back view.

20 Referring now to FIGURES 7 and 8, FIGURE 7 illustrates the load cell system 10 of the
21 present invention with front cover plate 98, and back cover plate 100, respectively.

1 The operation of load cell system 10 of the present invention in a preferred embodiment
2 includes the connection of the load cell system 10 to a crane for use in an industrial environment.
3 In particular, the load cell system 10 of the present invention is extraordinarily useful and uniquely
4 capable of performing useful service in the harshest of industrial environments such as the scrap
5 metal industry. In that environment, a crane is attached to a grappling hook or a magnet, for
6 example. The crane operator must vigorously slam the grappling hook or magnet into a tumbled
7 mass of metal so as to ensure proper contact and a secure grip. Thus, in this harsh environment
8 there is no gentle, careful placing of the crane magnet on the metal. Instead, again, it is slammed
9 aggressively into the metal. Once the metal is secured, the crane operator typically vigorously
10 yanks the metal upward and swings it rapidly to its destination such as a waiting freight car. A
11 particular problem faced by the industry is the quick and accurate measurement of the amount of
12 scrap metal so assembled. Historically, crane operators have been required to guess the
13 approximate weights of various types of metals to be assembled, load them in a freight car, have
14 the freight car weighed, and then add or subtract another estimated amount of metal to the freight
15 car as required. A second and perhaps third or more weighings is necessary with the weighing
16 systems of the present art.

17 By way of the load cell system 10 of the present invention, however, the operator may
18 continuously know the exact total amount of various types of metals that have been picked up and
19 delivered to a waiting freight car. In this embodiment, load cell system 10 is connected to a crane
20 by means of stick pin 92, as illustrated, which is connected, in a preferred embodiment, to two-
21 axis tilt compensative support assembly 88 which is, in turn, connected by two-axis support cross
22 pin 90 to frame 12 of load cell system 10. The load cell 16 is connected, as previously discussed,

1 by load cell output 64 to data transmission and receiving device 65. Data transmission and
2 receiving device 65 may be any computer now known or hereafter developed or any computing
3 device such as a laptop or other remote device. Further, load cell output 64 may be connected,
4 as again previously discussed, by hardwire or remotely without hard wiring. Data transmission
5 and receiving device 65 may be utilized to "zero" load cell 16 prior to operation and to receive
6 and record load cell 16 data during a job. Data transmission and receiving device 65 may be
7 located in the crane with the operator or remotely. Data transmission and receiving device 65
8 may, therefore, communicate not only directly with load cell 16 but also with the crane operator,
9 if data transmission and receiving device 65 is not located in the crane. In this manner, a remote
10 operator can coordinate a variety of load cell 16's throughout an area providing information to and
11 receiving information for from various load cell 16's and to and from various crane operators.

12 Upper compliance assembly 14 and lower compliance assembly 18 operate substantially
13 in the same manner. They are effective cushions against harsh shocks and both rebound and
14 compressive loads and shield load cell 16 from the harsh motions associated in the industrial
15 environment as previously described as the common use of cranes, for example. An important
16 part of the compliance assemblies is the surrounding of load plate 40 in sandwich manner by a
17 rebound pad 38 and a compression pad 40. In upper compliance assembly 14 in a preferred
18 embodiment, both rebound and compression pads are comprised of a highly incompressible
19 material such as manufactured by Fabreeka International, Inc., P.O. Box 210, 1023 Turnpike
20 Street, Stoughton, Massachusetts 02072, www.fabreeka.com, and sold under the trade name
21 FABREEKA brand pads.

1 In use, as previously mentioned, a crane operator typically will slam the crane with load
2 cell system 10 attached roughly into a pile of scrap metal. In that instance, as illustrated in Figure
3 2, the pad located directly above load plate 40 in upper compliance assembly 14 will serve as
4 compression pad 44. Referring to the lower detail shown in Figure 3, the reverse is true in that
5 the compression pad 44 is located beneath load plate 40. Again, this reflects the nature of the
6 industry wherein the load cell system 10 of the present invention will be initially propelled
7 forcefully into a mass of materials to be picked up. Thereafter, in the normal circumstance, the
8 operator quickly lifts the material forcefully upward. In that instance, compression pad 44 in
9 lower compliance assembly 18 resists compression as the material is lifted. In each instance, the
10 rebound pad 38 serves the required function of dampening the aggressive forces applied to load
11 cell system 10 and prevent them from damaging load cell 16.

12 In a further embodiment, a moving overload limit 28 serves to allow load cell 16 to be
13 stretched and compressed within a very narrow limit that does not overload load cell 16. Beyond
14 that, in a preferred embodiment, fixed overload limit 26 is provided to assure that in the case of
15 maximum forces being applied to load cell system 10 no damage occurs to load cell 16, as is a
16 particularly recurrent problem in the prior art. These maximum forces outside the limits of load
17 cell 16 are completely prevented from being transmitted to load cell 16 by the presence of fixed
18 overload limit 26. Additionally, in a preferred embodiment, anti-rotation device 24 restricts the
19 movement of load cell system 10 around vertical axis of rod end link 22, upper hanger stud 20,
20 and drawbar 30, for example. Again, this is to insure that load cell 16 is never stressed beyond
21 its operating limits either in torque, elongation or compression. In operation, the range of
22 movement of drawbar 30 and moving overload limit 28 is in the nature of 1/4 inch or 6.4 mm.

1 Load cell 16 can be of any type now known or hereafter developed so long as it is capable
2 of being incorporated within load cell system 10. In a preferred embodiment, load cell 16 of any
3 known design is encompassed by load cell loading saddle 54 comprised of upper load cell loading
4 saddle 56 and lower load cell loading saddle 58. Once shielded and surrounded by load cell
5 loading saddle 54, the load cell 16 is securely connected to a pair of load cell mounting yokes 52
6 which thereafter are connected to first base 36 of upper compliance assembly 14.

7 By way of the present invention, load cell system 10 provides the operator of heavy
8 equipment, such as cranes and the like, heretofore unknown assurances of accuracy in weighing
9 systems on the spot, at the moment of the use of the load cell system 10. Advantages of load cell
10 system 10 are found in particular with upper compliance assembly 14 and lower compliance
11 assembly 18. The compliance assemblies perform the function of a spring using commercially
12 available organic elastomeric shock isolation pad material as previously discussed. The
13 compliance assemblies include an oscillation damping function without the need for fluids or
14 friction damping media. Damping, by way of load cell system 10 of the present invention, instead
15 is by means of the hysteresis properties of the compression pad 44 and rebound pad 38 materials
16 as previously discussed. These materials are cost efficient and require minimum maintenance due
17 to lack of wear or breakage or need for lubrication. As a result, these materials provide for an
18 extremely high spring rate in a very compact easily shielded package. Further, the load cell
19 system 10 of the present invention provides for extremely high spring rates without concern for
20 fatigue and wear as would be the case with other types of springs, such as Belville spring washers
21 as they are known in the art.

1 Still further, the physical alignment of the compression pads 44 and rebound pads 38, load
2 plate 40, and first base 36 and second base 46 by means of a pair of load plate loading pins 48 and
3 a pair of base locating pins 50 are configured to pass through the elastomeric pads so as to provide
4 positive electrical isolation of load cell 16 from the frame 12 and any connected crane boom. This
5 structure provides isolation of the load cell 16 from disruptive electrical impulses and noise which
6 are induced in these large structures. Further, a measure of protection from direct lightening
7 strike on crane booms is also thereby provided.

8 A further advantage of load cell system 10 of the present invention relates directly to load
9 cell 16. Load cell 16 is again, any commercially available, legal for trade load cell now known
10 or hereafter developed. This commercial availability of the load cell enables it to be maintained
11 on hand as a "field replaceable" component. In particular, a load cell manufactured by the
12 Sensortronics company of Covina, California 91722, www.sensortronics.com sold as Model
13 number 65016 is suitable. This brand of load cell or any other load cell having like specifications
14 is useful since it is a type of load cell commonly employed for tank and bin measurements.
15 Characteristics of these load cells are well known and easily interfaced. Further, these types of
16 load cells are "double-shear-beam" type load cells which are much more accurate and resistant to
17 side load than strain-gage-on-rod or s-beam cells. Their reliability and certification has been
18 previously determined by the Original Equipment Manufacturer ("OEM"). Nonetheless, certainly,
19 any load cell 16 now known or hereafter developed that is suitable for the purposes described
20 herein may be used.

21 Another major improvement of load cell system 10 of the present invention relates to the
22 overload limits. Fixed overload limit 26 prevents overload of load cell 16 by limiting the

1 movement of load cell 16 to a small physical motion of twenty to forty thousandths of an inch
2 while, due to the action of compliance assemblies 14 and 18 moving overload limit 28 has a
3 relatively large physical motion of approximately 1/4 inch, in a preferred embodiment. The limit
4 range of moving overload limit 28 to fixed overload limit 26 is field adjustable and is easy to
5 adjust for varying application conditions. Adjustment does not require unusual or special tools.
6 Additionally, the large area of impact, as shown in the drawings, keeps the unit load forces on
7 fixed overload limit 26 and moving overload limit 28 low. As a compatible result, fatigue of
8 materials and subsequent degradation of materials is minimized. Additionally, the overload limits
9 of the present invention do not require close tolerances to manufacture and the stop settings are
10 relatively free of temperature induced defects due to physical expansion/contraction of component
11 materials.

12 Finally, drawbar 30 of load cell system 10 of the present invention provides advantages
13 over the prior art in that no grease or oil is necessary for lubrication. Lubrication by grease or
14 oil as is known in the prior art inevitably attracts dirt which finds its way into prior art bearings
15 resulting in friction and wear. In Applicant's invention, the use of PTFE polymer composite
16 bushings for drawbar bearing 32 results in a heavy shock tolerance and low friction with no
17 lubricant required. The absence of lubricant results in minimum sealing requirements. As a
18 result, nonspring-loaded seals may be employed to dry wipe drawbar 30. In a preferred
19 embodiment drawbar 30 is coated with NEDOX brand plating material offered by General
20 Magnaplate Corporation, 1331 Route 1, Linden, New Jersey 07036.

21 These and other advantages of the present invention are obvious to persons of ordinary skill
22 in the art and are not disclosed more fully hereafter. The multiple figures in the accompanying

drawings are for illustrative purposes only and are not presented in any way to limit the scope of the invention. In that regard, while the load cell system 10 of the present invention has been disclosed in connection with heavy industrial environments, it should be appreciated that the load cell system 10 can be used with other weighing systems as well. Still further, while the present invention has been disclosed in connection with the preferred embodiments thereof, it should be understood that there may be other embodiments which fall within the spirit and scope of the invention as defined by the following claims.

1 **CLAIMS:**

1 1. A load cell apparatus comprising:

- 2 (a) a frame;
- 3 (b) an upper compliance assembly connected to said frame;
- 4 (c) a load cell connected to said upper compliance assembly; and
- 5 (d) a lower compliance assembly connected to said load cell.

1 2. The apparatus of Claim 1 wherein said upper and lower compliance assemblies further
2 comprise:

- 3 (a) a first base;
- 4 (b) a compression pad connected to said first or second base;
- 5 (c) a rebound pad;
- 6 (d) a load plate between said rebound pad and said compression pad; and
- 7 (e) a second base connected to said rebound pad or said compression pad.

1 3. The apparatus of Claim 1 wherein said load cell further comprises:

- 2 (a) a load cell yoke connected to said upper assembly; and
- 3 (b) an upper and lower loading saddle connected to said load cell.

1 4. The apparatus of Claim 1 further comprising an overload limit.

- 1 5. The apparatus of Claim 4 wherein said overload limit further comprises:
- 2 (a) a fixed overload limit; and
- 3 (b) a moving overload limit.
- 1 6. The apparatus of Claim 1 wherein said upper compliance assembly and said load cell are
- 2 connected to each other and to said frame by a hanger stud.
- 1 7. The apparatus of Claim 1 wherein said lower compliance assembly further comprises:
- 2 (a) a rod end link connected to said load cell; and
- 3 (b) a drawbar connected to said rod end link.
- 4 8. The apparatus of Claim 1 further comprising a rotation preventor.
- 5 9. The apparatus of Claim 7 further comprising a rotation preventor connected to said
- 6 drawbar.
- 1 10. The apparatus of Claim 1 further comprising a data transfer means for providing data to
- 2 the load cell and for receiving data from the load cell.
- 1 11. In a weighing system, a load cell method comprising the steps of:
- 2 (a) connecting a frame to the weighing system;
- 3 (b) connecting an upper compliance assembly to said frame;

(c) connecting a load cell to said upper compliance assembly; and

(d) connecting a lower compliance assembly to said load cell.

12. The method of Claim 11 further comprising the step of providing said upper and lower compliance assemblies with:

(a) a first base;

(b) a compression pad;

(c) a rebound pad;

(d) a load plate located between said rebound pad and said compression pad; and

(e) a second base.

13. The method of Claim 11 further comprising the steps of:

(a) connecting a load cell yoke to the upper assembly; and

(b) connecting an upper and lower loading saddle to said load cell.

14. The method of Claim 11 further comprising the step of connecting an overload limit.

15. The method of Claim 14 wherein connecting said overload limit further comprises the steps of:

(a) providing a fixed overload limit; and

(b) providing a moving overload limit.

1 16. The method of Claim 11 further comprising the step of connecting said upper compliance
2 assembly to said frame by a hanger stud.

1 17. The method of Claim 11 further comprising the steps of:

2 (a) connecting a rod end link to said load cell; and

3 (b) connecting a drawbar to said rod end link.

1 18. The method of Claim 11 further comprising the step of adding a rotation preventor.

2 19. The method of Claim 17 further comprising the step of connecting a rotation preventor to
said drawbar.

3 20. The method of Claim 11 further comprising the step of connecting a data transmission
means to said load cell for transmitting and receiving data to and from said load cell.

1 **LOAD CELL APPARATUS AND METHOD**


2 **ABSTRACT OF THE DISCLOSURE**

3 A load cell system (10) having a frame (12) to which upper compliance assembly (14) is
4 connected. A load cell (16) is connected to upper compliance assembly (14) and lower compliance
5 assembly (18) is connected to load cell (16). In preferred embodiments, load cell system (10)
6 includes fixed overload limit (26), moving overload limit(28), and anti-rotation device (24). In
7 a still further embodiment, load cell system (10) includes a data transmission and receiver device
8 (65) for transmitting and receiving data to and from load cell (16).

9
10
11 I:\C:\db\A-D\Amtex\101\Finalapp.wpd

This diagram shows an exploded perspective view of a mechanical assembly. The main components are labeled with numbers and arrows:

- 10**: Points to the left side of the main housing.
- 12**: Points to the front face of the main housing.
- 14**: Points to a top bracket or support structure.
- 16**: Points to a component on the right side of the assembly.
- 18**: Points to a bottom bracket or support structure.
- 20**: Points to a central vertical shaft or rod.
- 22**: Points to a central vertical shaft or rod.
- 24**: Points to a component on the left side of the assembly.
- 26**: Points to a component on the right side of the assembly.
- 28**: Points to a component on the right side of the assembly.
- 30**: Points to a circular end component at the bottom.
- 32**: Points to a component on the left side of the assembly.
- 34**: Points to a circular end component at the top.

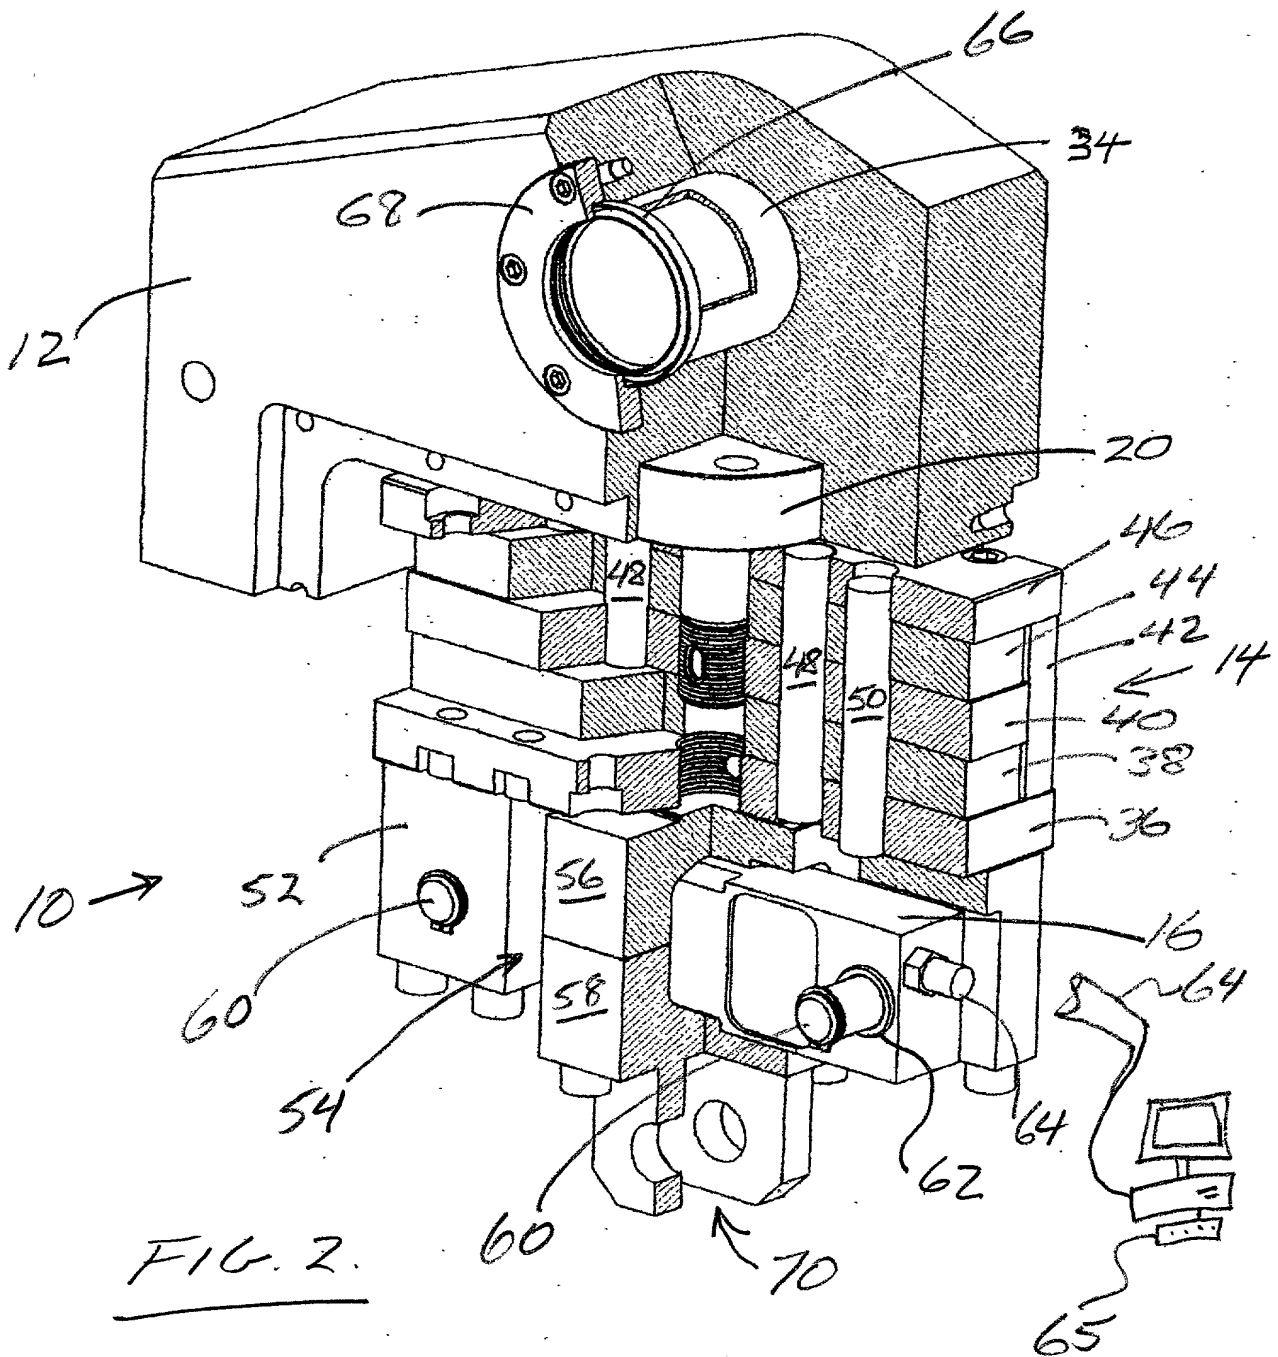





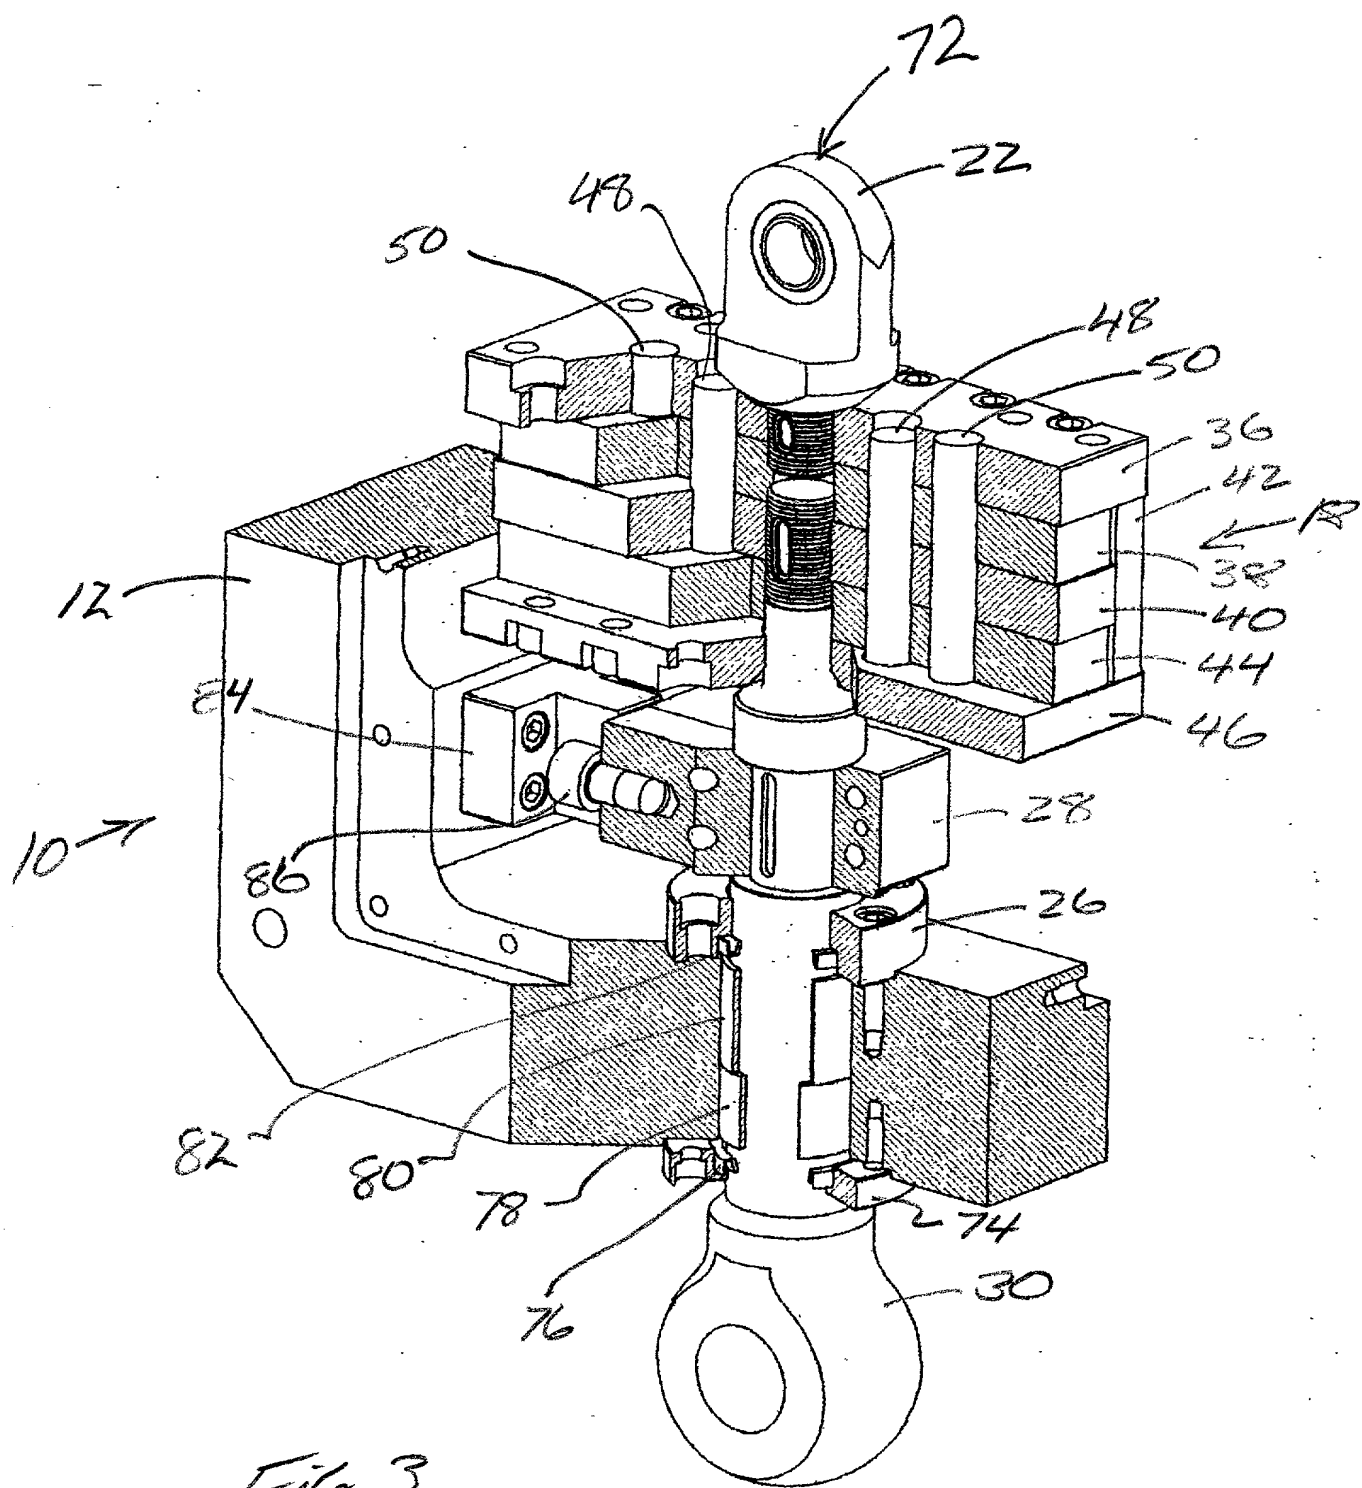


Fig. 3

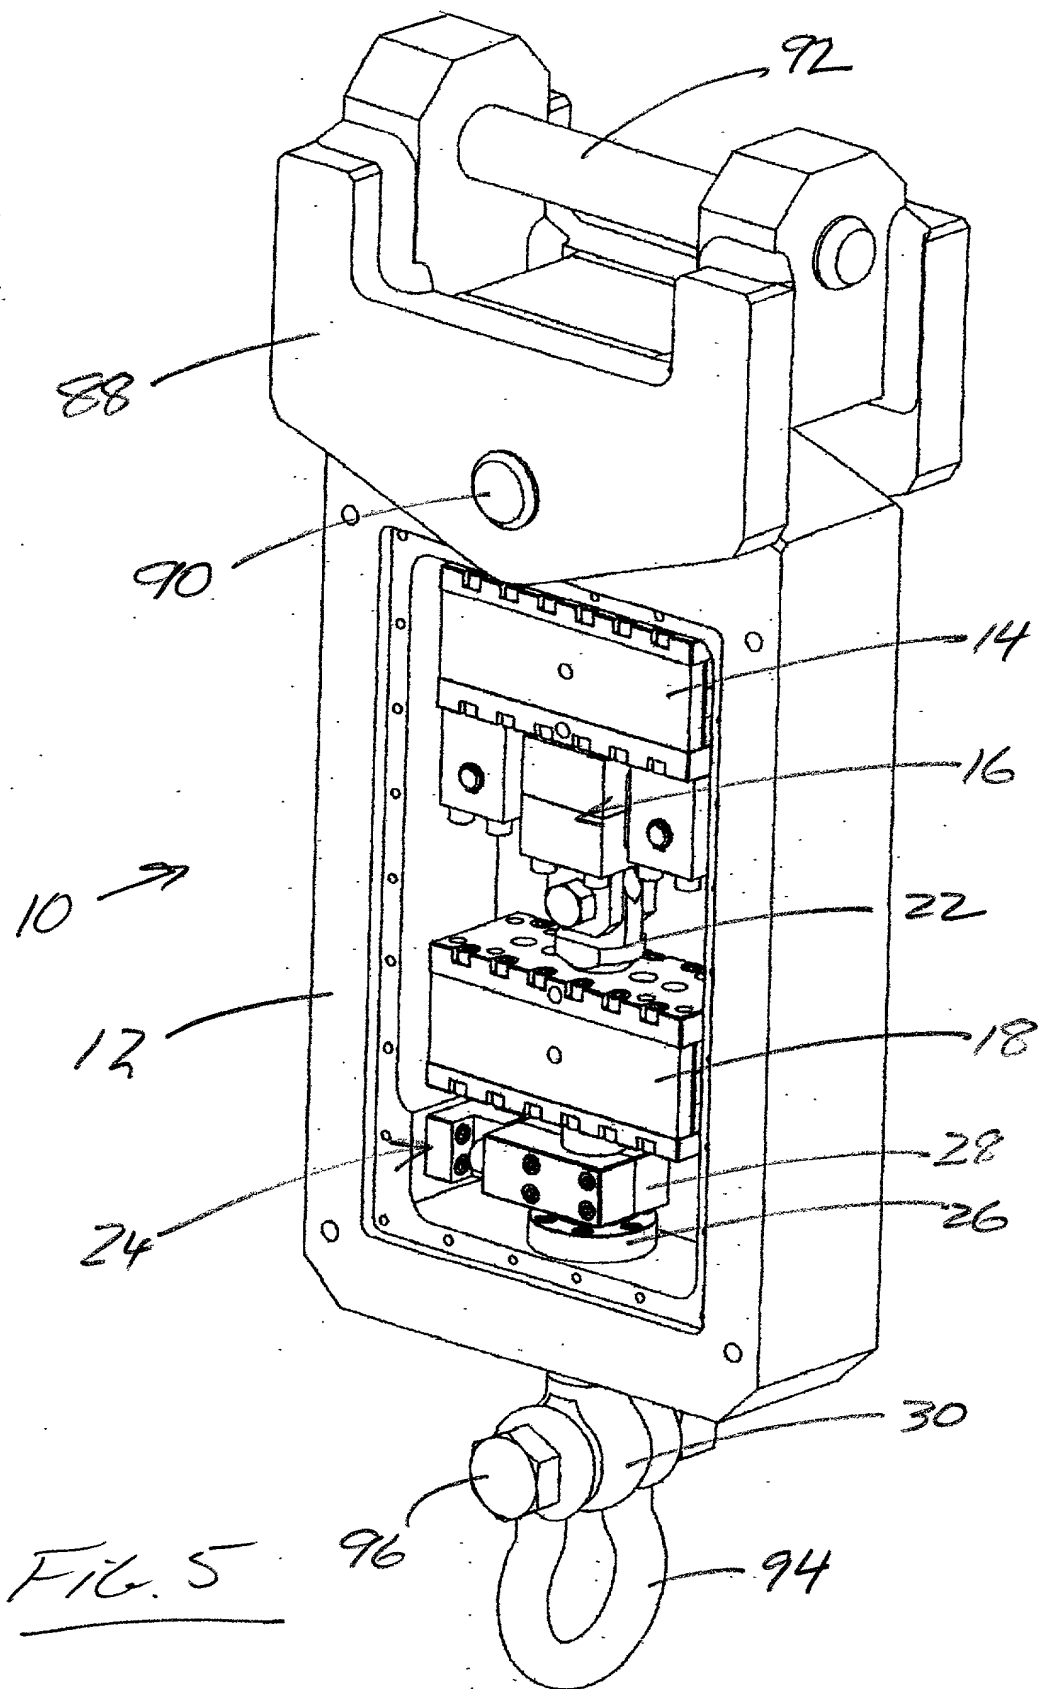

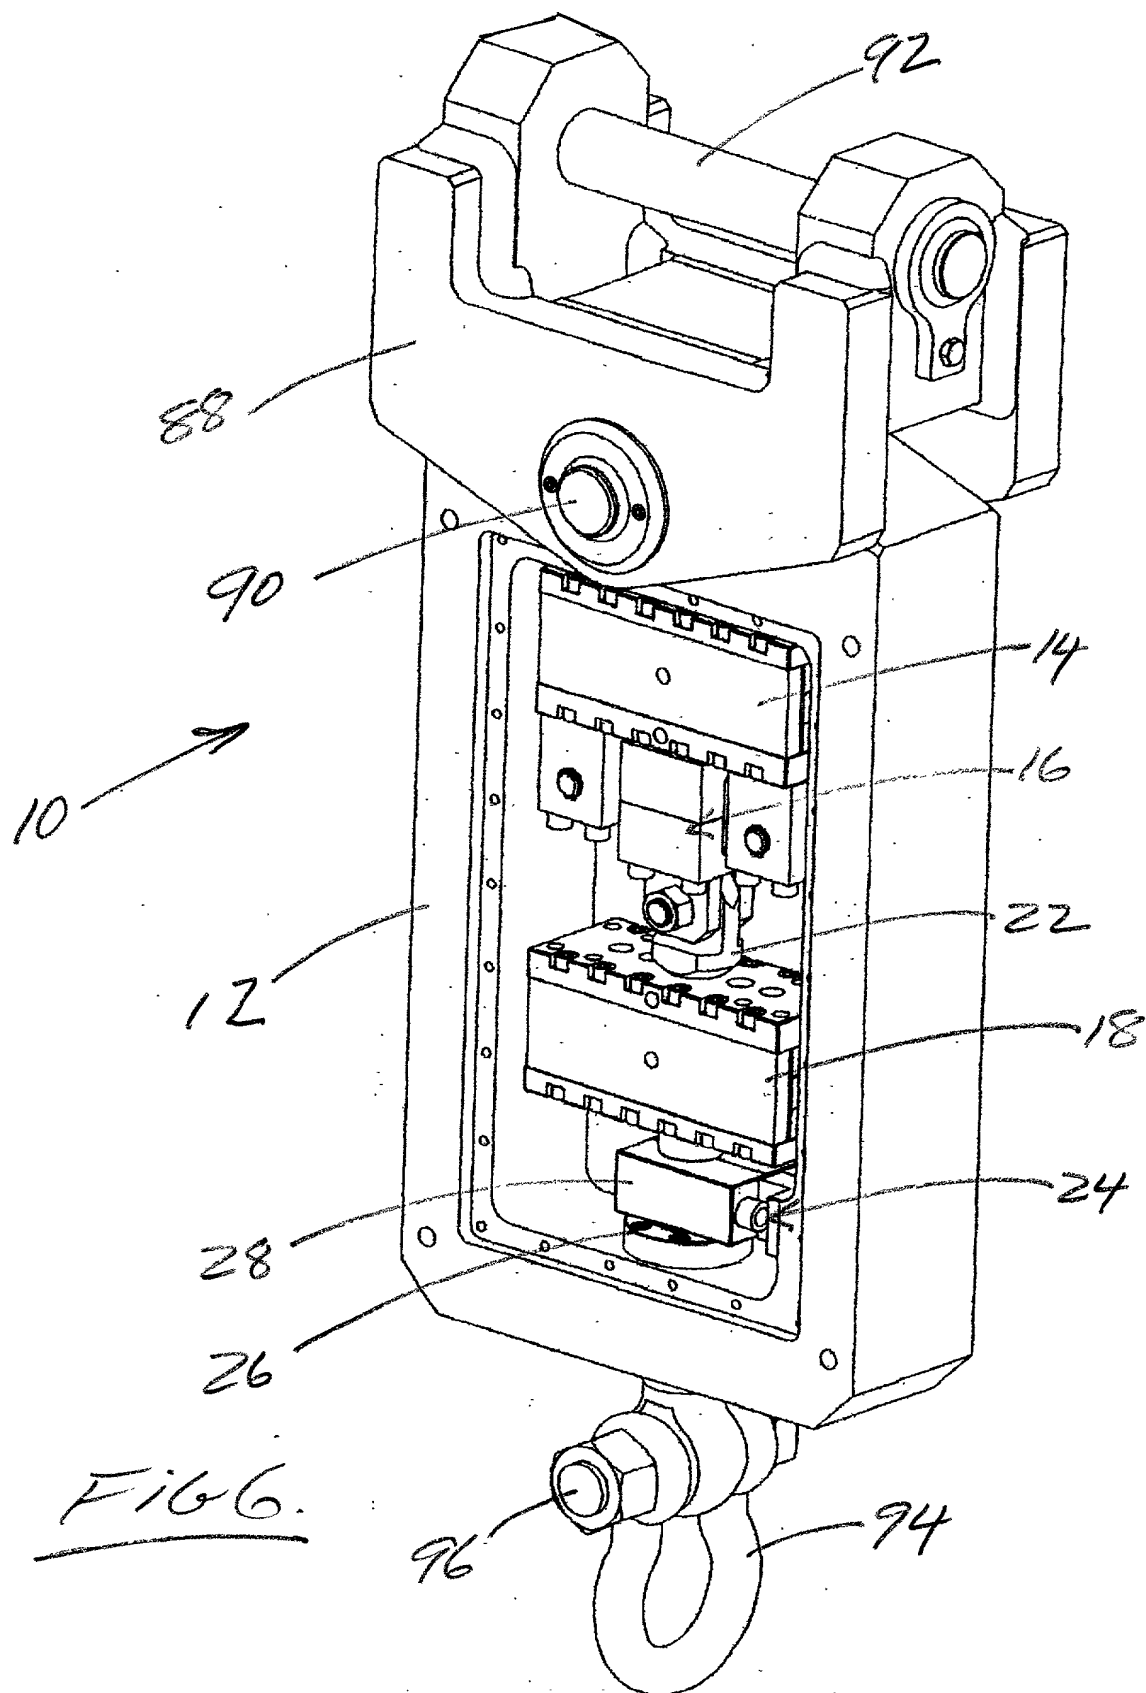

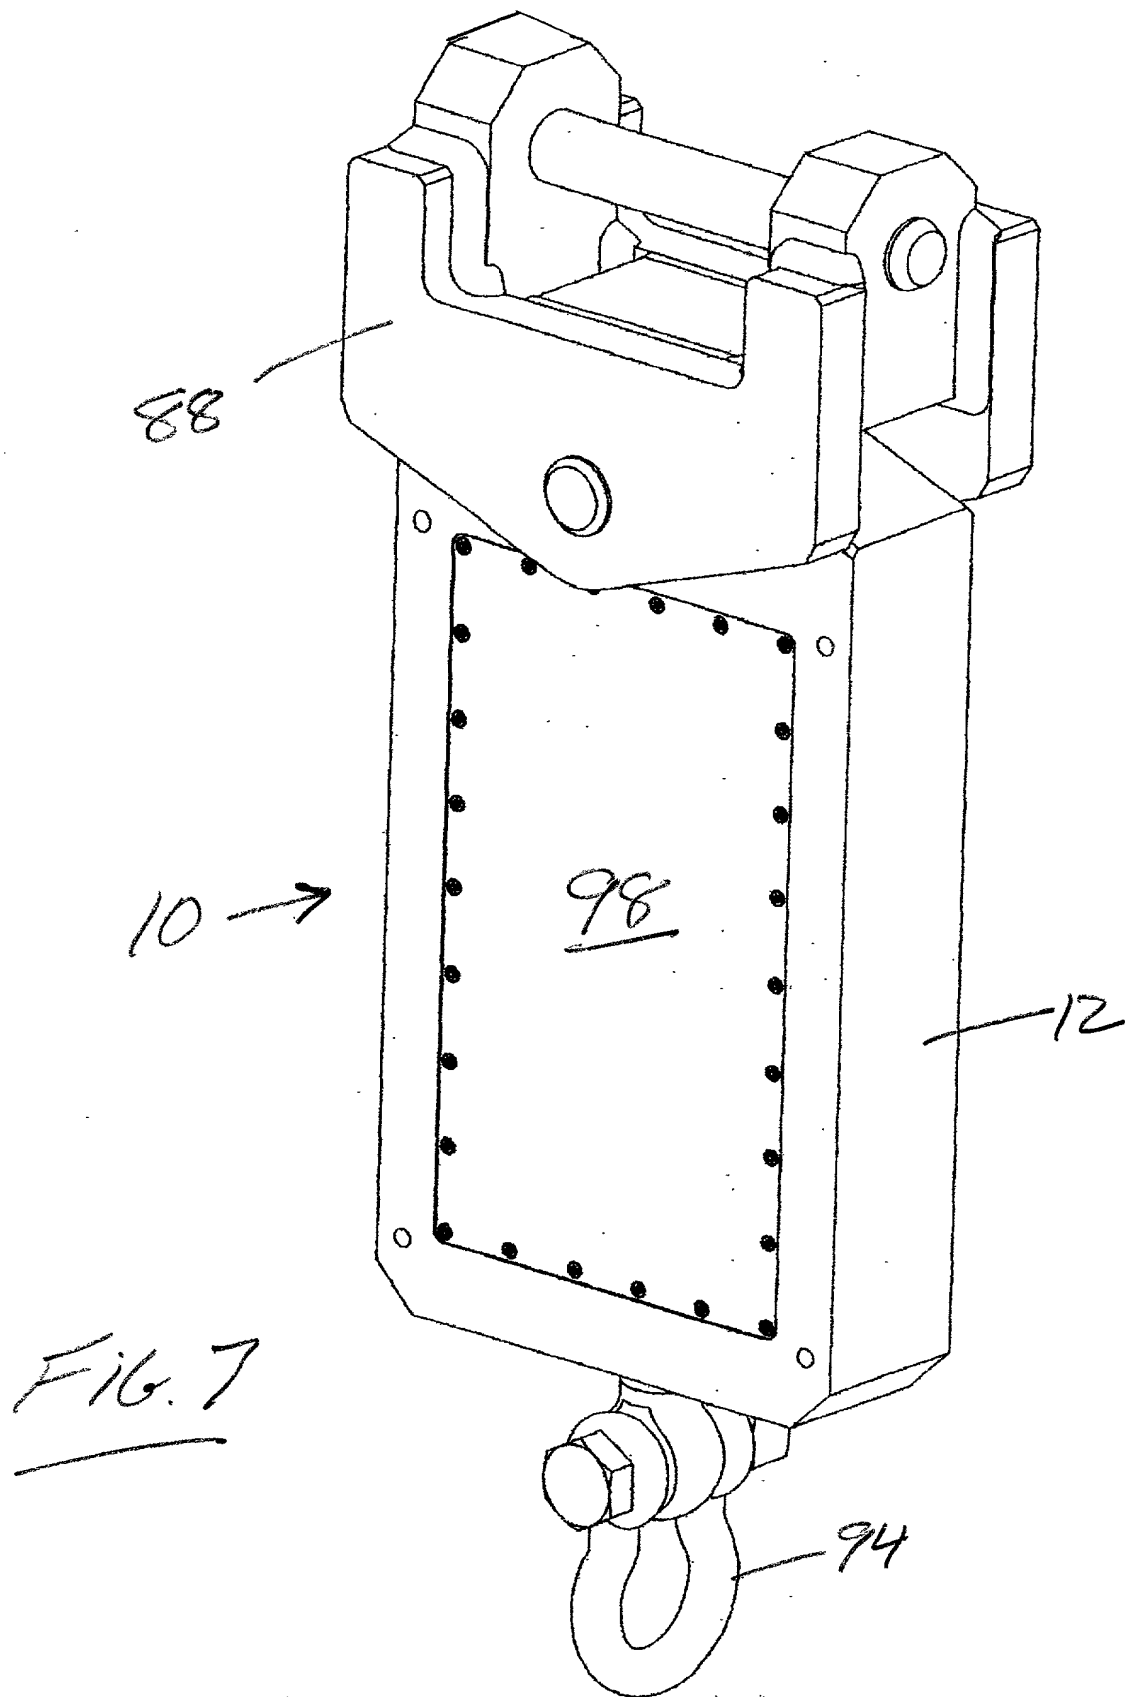

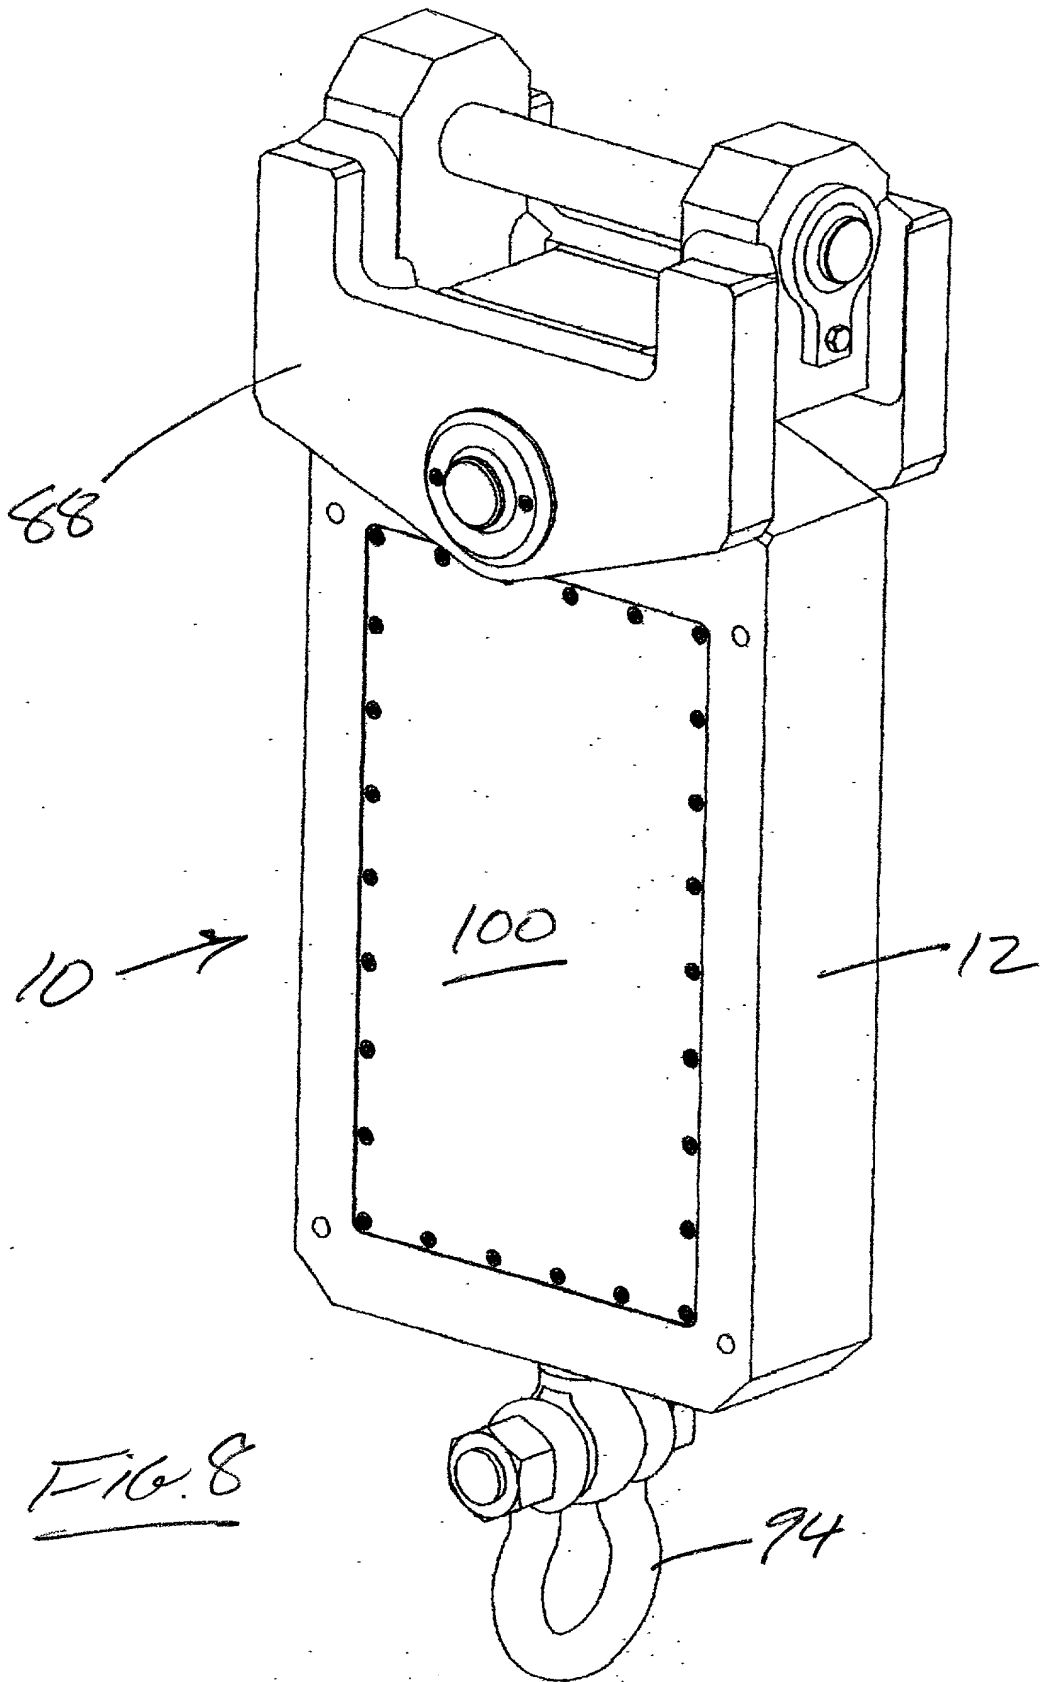

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: LOAD CELL APPARATUS AND METHOD described and claimed in the attached specification;

I have reviewed and understand the content of the attached specification, including the claims, as amended by any amendment referred to above. I acknowledge my duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, C.F.R. §1.56(a).

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:


John Nevin Shaffer, Jr., Reg. No. 29,858
Russell D. Culbertson, Reg. No. 32,124

Address telephone calls to J. Nevin Shaffer, Jr. at telephone number: 512/327-8932. Address correspondence to:
J. Nevin Shaffer, Jr., 1250 Capital of Texas Highway, S., Building One, Suite 360, Austin, Texas 78746.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Date


3-10-2000

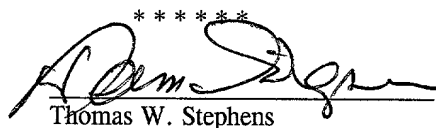
Thomas W. Stephens

Residence: Leander, Texas
Citizenship: United States of America
Post Office Address: 4300 E. Whitestone Blvd., Leander, Texas 78641

Date

3-10-00

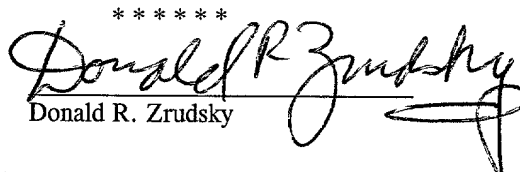
Donald R. Zrudsky

Residence: Liberty Hill, Texas
Citizenship: United States of America
Post Office Address: 187 River Road, Liberty Hill, Texas 78642